

BOMBA SUMERGIBLE PARA AGUA LIMPIA

Modelos GDQ1.5-17-0.37F, GDQ1.5-22-0.55F, GDQ1.5-32-0.75F



TABLA DE ESPECIFICACIONES

CLAVE	MODELO	POTENCIA HP W	MOTOR	H. MÁXIMA m	RANGO OPERACIÓN H(m) Q(l/m)	DESCARGA	FLOTADOR INTEGRADO	CABLE LARGO	DIMENSIONES mm	PESO
G2405F	GDQ1.5-17-0.37F	½ 370	127V~60Hz 1F	17	17÷6.5 10÷110	NPT 1"	SI	8 m	395 x 155 x 195	8.5 Kg
G2406F	GDQ1.5-22-0.55F	¾ 550		22	22÷6.5 6÷110	NPT 1"	SI	8 m	400 x 160 x 205	15 Kg
G2408F	GDQ1.5-32-0.75F	1 750		32	32÷6.5 6÷130	NPT 1"	SI	8 m	445 x 255 x 205	16 Kg

MOTOR CON PROTECCIÓN TÉRMICA



INCLUYE FLOTADOR PARA BAJO NIVEL DE AGUA



EMBOBINADO DE COBRE




PARA AGUA LIMPIA (LIBRE DE SÓLIDOS)



CABLE DE CONEXIÓN CON CLAVIJA



APLICACIONES: Uso Residencial, Agrícola e Industrial.

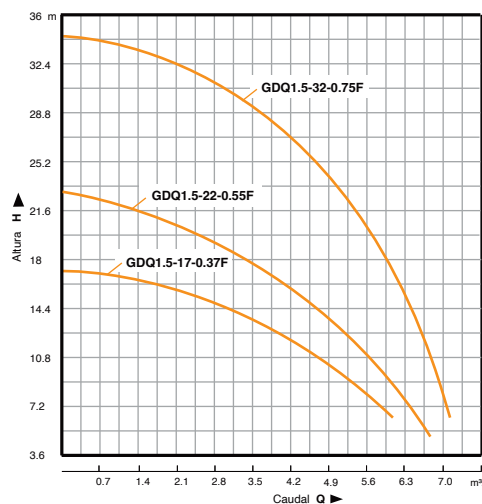

REFACCIONES

MODELO	CLAVE	BASE MODELO	CLAVE	IMPULSOR MODELO	CLAVE	CABLE MODELO	CLAVE	FLOTADOR MODELO
GDQ1.5-17-0.37F	1966	DZ-GWT10-7	7154	YL-GDQ1.5-17	0666	CBL-GDQ1.5-17	1360	FL-GDQ1.5-17
GDQ1.5-22-0.55F	1961	WK-GDQ1.5-22	7155	YL-GDQ1.5-22	0667	CBL-GDQ1.5-22	1361	FL-GDQ1.5-22
GDQ1.5-32-0.75F	1962	WK-GDQ1.5-32	7156	YL-GDQ1.5-32	0668	CBL-GDQ1.5-32	1362	FL-GDQ1.5-32

REFACCIONES

MODELO	CLAVE	BASE MODELO	CLAVE	IMPULSOR MODELO	CLAVE	CABLE MODELO	CLAVE	FLOTADOR MODELO
GDW6-12-0.55F	1963	DZ-GDW6-12	7157	YL-GDW6-12	0669	CBL-GDW6-12	1363	FL-GDW6-12
GDW6-16-0.75F	1964	DZ-GDW6-16	7158	YL-GDW6-16	0670	CBL-GDW6-16	1364	FL-GDW6-16
GDW7-15-1.1F	1965	DZ-GDW7-15	7159	YL-GDW7-15	0671	CBL-GDW7-15	1365	FL-GDW7-15