

Utility Pumps

5 SERIES 1/6 HP Submersible Use



WATER WIZARD®

Applications

- Submersible, water transfer or recirculation, water displays, air conditioners and machine tool coolants

Features

- 1/6 hp shaded pole motor
- Garden hose adapter and removable inlet screen
- Epoxy coated cast aluminum housing
- Nylon volute
- Fluoroelastomer (FKM) shaft seal
- Stainless steel shaft
- Lifetime oil supply

Series Specifications

Capacity: 1200 gph @ 1'
(4542 lph @ 0.3 m)

Electrical: 115 V, 60 Hz
230 V, 60 Hz

Shut Off: 26.3' (8 m)


Operation: Manual or Automatic

Liquid Temperature: 120 °F (49 °C)

Discharge: 1" FNPT (25.4 mm)

Impeller: Nylon

Performance Curve

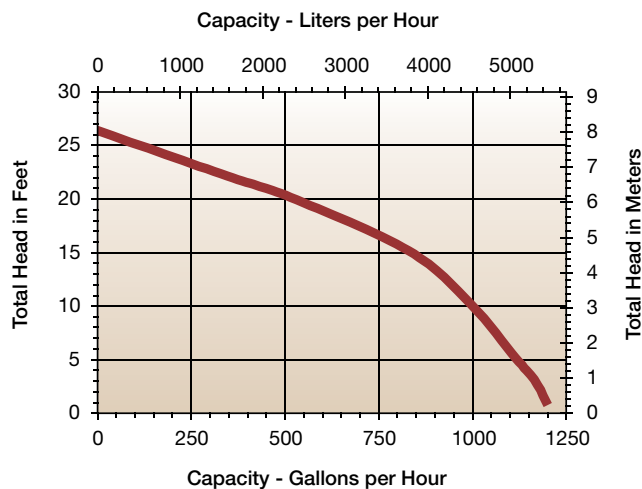

Model Characteristics

Item #	Model	Volts	Cord	Listing	Switch Type	On Level	Off Level
505300	5-ASP	115	10' 3 m	cCSAus	Piggyback Diaphragm	6" - 9" 15.2 cm - 23 cm	1" - 4" 2.5 cm - 10 cm
505350	5-ASP-LL	115	18' 5.5 m	cCSAus	Piggyback Diaphragm	2" - 3" 5 cm - 7.6 cm	0.5" - 1.5" 1.3 cm - 3.8 cm
505400	5-ASP-FS	115	10' 3 m	cCSAus	Integral Float Switch	10" - 12" 24.5 cm - 30.5 cm	2" - 4" 5.1 cm - 10.2 cm
505486	5-MSPR	115	10' 3 m (black pump)	cCSAus	—	—	—
505000	5-MSP	115	10' 3 m	cCSAus	—	—	—
505025	5-MSP	115	25' 7.6 m	cCSAus	—	—	—
505176	5-MSP	115	18' 5.5 m	cCSAus	—	—	—
505202	5-MSP	230	12' 3.6 m (w/o plug)	—	—	—	—