
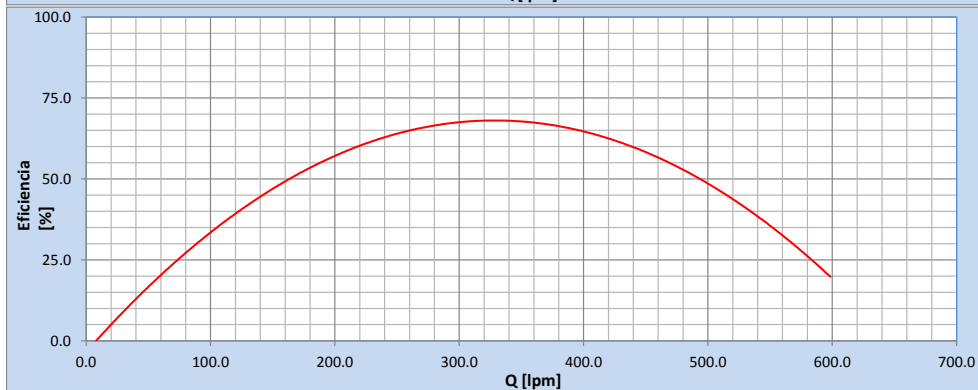
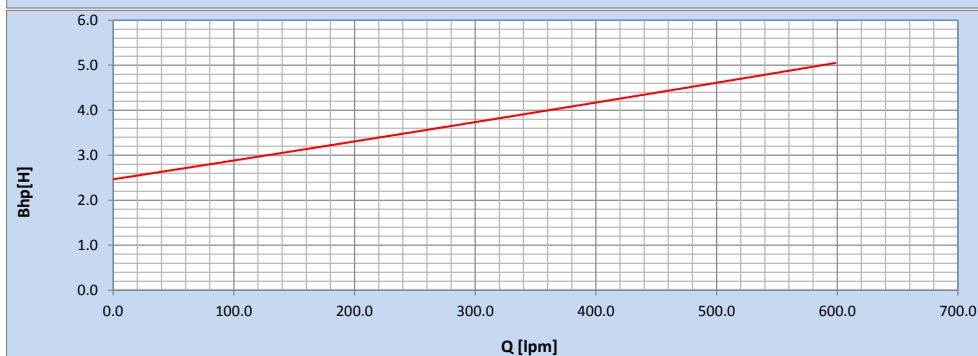


BOMBAS DE ALTO CAUDAL

Datos de Motor:				Datos de Bomba:											
Marca: <u>siemens</u>				Tipo: <u>CENTRIFUGA</u>											
Modelo: <u>JM100</u>				Modelo: <u>PO5A-50 2 X 2</u>											
Potencia: <u>5.00 HP</u>				Ø Succión: <u>2.00 in</u>											
Velocidad: <u>3550 RPM</u>				Ø Descarga: <u>2.00 in</u>											
Voltaje: <u>220 VAC</u>				Ø Impulsor: <u>6.00 in</u>											
Inom: <u>12 A</u>				Curva Teórica:											
Factor de Servicio: <u>1.15</u>				Ø Impulsor: <u>0.00 in</u>											
Eficiencia: <u>88.5 %</u>				Velocidad Motor: <u>0 RPM</u>											
Motobombas															
Q [lpm]	0.0	63.0	126.0	189.0	252.0	315.0	378.0	409.5	441.0	504.0	567.0	598.5	598.5	598.5	598.5
H [m]	45.0	43.7	45.5	38.9	37.0	35.3	32.5	29.5	27.6	26.6	21.0	9.5	9.5	9.5	9.5
I [A]	6.0	6.6	7.1	7.8	8.4	9.0	9.5	10.1	10.8	11.5	12.0	12.0	12.0	12.0	12.0
Bhp [HP]	2.5	2.8	3.0	3.3	3.5	3.8	4.0	4.2	4.5	4.8	5.0	5.0	5.0	5.0	5.0
Eficiencia (%)	0.0	21.9	42.4	49.5	58.3	64.9	67.9	62.8	59.2	61.2	55.0	0.0	0.0	24.9	24.9

Tabla de Rendimientos Curva Teórica														
Q [lpm]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
H [m]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Bhp [HP]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Eficiencia [%]	0.0	21.9	42.4	49.5	58.3	64.9	67.9	62.8	59.2	61.2	55.0	0.0	0.0	24.9

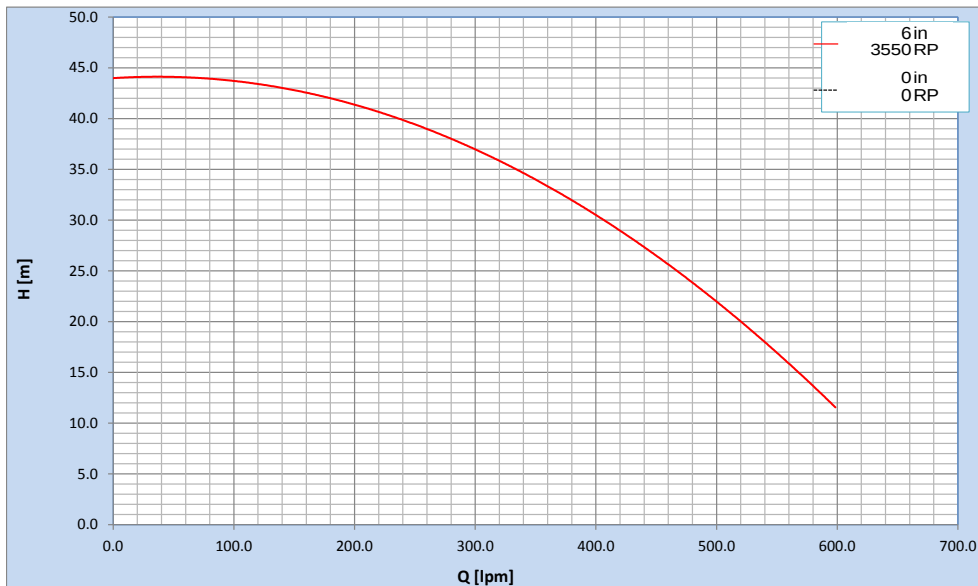

2 X 2