
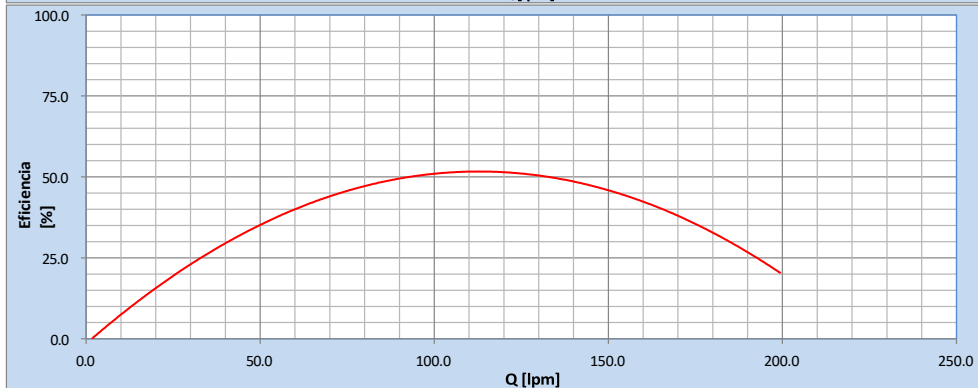
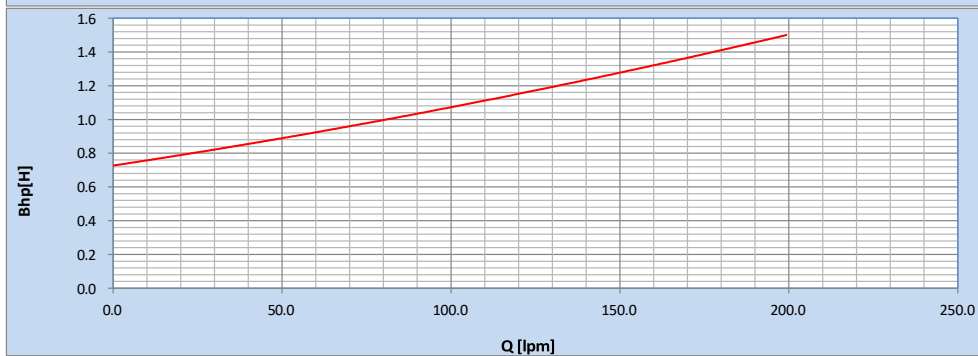


BOMBAS MEDIANAS

Datos de Motor:					Datos de Bomba:										
Marca: <u>siemens</u>					Tipo: <u>CENTRIFUGA</u>										
Modelo: <u>ARMAZON 56</u>					Modelo: <u>PO3A-315 1 1/2 X 1 1/2</u>										
Potencia: <u>1.50</u> HP					Ø Succión: <u>1.25</u> in										
Velocidad: <u>3550</u> RPM					Ø Descarga: <u>1.00</u> in										
Voltaje: <u>110</u> VAC					Ø Impulsor: <u>5.55</u> in										
Inom: <u>20.4</u> A					Curva Teórica:										
Factor de Servicio: <u>1.3</u>					Ø Impulsor: <u>0.00</u> in										
Eficiencia: <u>70</u> %					Velocidad Motor: <u>0</u> RPM										
Motobombas															
Q [lpm]	0.0	21.0	63.0	73.5	84.0	94.5	115.5	120.8	147.0	168.0	189.0	199.5	199.5	199.5	200
H [m]	28.0	27.8	27.3	26.4	25.7	24.7	22.7	20.9	18.8	17.9	14.9	10.5	10.5	10.5	10.5
I [A]	12.0	13.0	14.2	15.3	16.1	17.0	18.4	19.5	20.8	22.0	23.0	24.2	24.2	24.2	24.2
Bhp [HP]	0.7	0.8	0.9	0.9	1.0	1.1	1.1	1.2	1.3	1.4	1.4	1.5	1.5	1.5	1.5
Eficiencia [%]	0.0	15.9	42.7	44.8	47.3	48.5	50.3	45.7	46.9	48.2	45.7	0.0	0.0	30.4	30.4

Tabla de Redimientos Curva Teórica															
Q [lpm]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
H [m]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Bhp [HP]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Eficiencia [%]	0.0	15.9	42.7	44.8	47.3	48.5	50.3	45.7	46.9	48.2	45.7	0.0	0.0	30.4	30.4

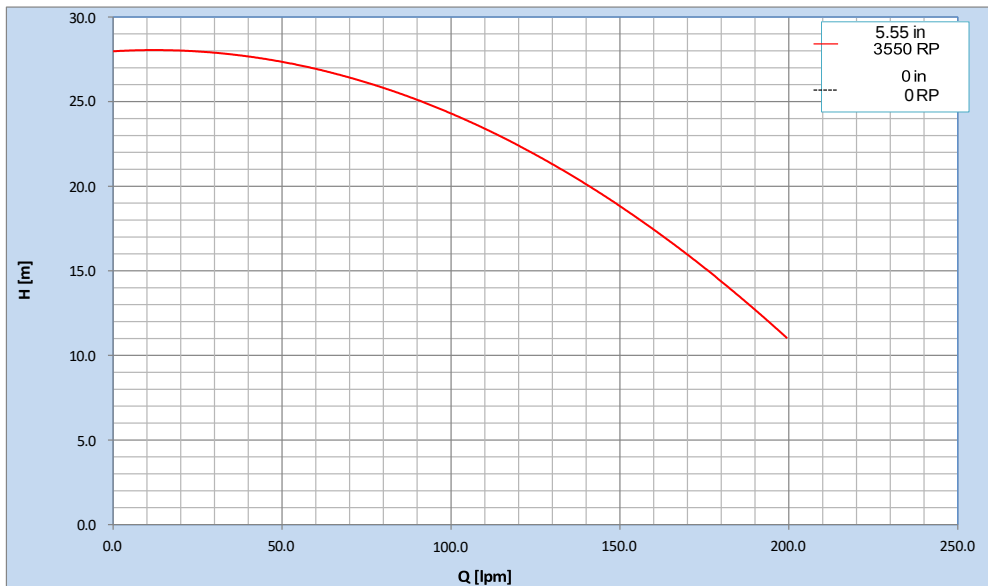

1 1/2 X 1 1/2