
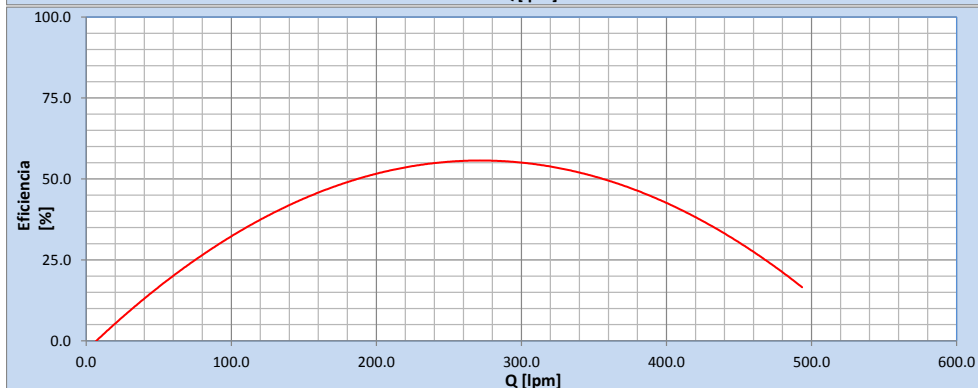
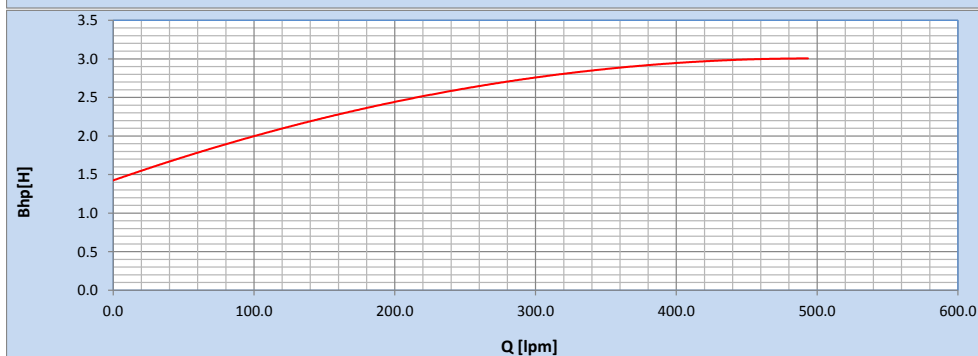


BOMBAS DE ALTO CAUDAL

Datos de Motor:					Datos de Bomba:										
Marca: siemens					Tipo: CENTRIFUGA										
Modelo: JM 100					Modelo: PO5A-30 2 X 2										
Potencia: 3.00 HP					Ø Succión: 2.00 in										
Velocidad 3550 RPM					Ø Descarga: 2.00 in										
Voltaje: 220 VAC					Ø Impulsor: 5.55 in										
Inom 7.6 A					Curva Teórica:										
Factor de Servicio: 1.15					Ø Impulsor: 0.00 in										
Eficiencia: 86 %					Velocidad Motor: 0 RPM										
Motobombas															
Q [lpm]	0.0	42.0	84.0	126.0	168.0	210.0	252.0	294.0	378.0	420.0	462.0	493.5	493.5	493.5	493.5
H [m]	29.7	29.5	28.5	27.5	27.3	25.8	23.8	22.3	20.0	17.2	11.5	5.7	5.7	5.7	5.7
I [A]	3.8	4.2	4.7	5.3	5.8	6.2	6.8	7.1	7.4	7.5	7.6	7.6	7.6	7.6	7.6
Bhp [HP]	1.5	1.7	1.9	2.1	2.3	2.4	2.7	2.8	2.9	3.0	3.0	3.0	3.0	3.0	3.0
Eficiencia (%)	0.0	16.4	28.2	36.3	43.9	48.5	48.9	51.2	56.7	53.4	41.4	0.0	0.0	20.5	20.5

Tabla de Redimientos Curva Teórica														
Q [lpm]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
H [m]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Bhp [HP]	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Eficiencia [%]	0.0	16.4	28.2	36.3	43.9	48.5	48.9	51.2	56.7	53.4	41.4	0.0	0.0	20.5

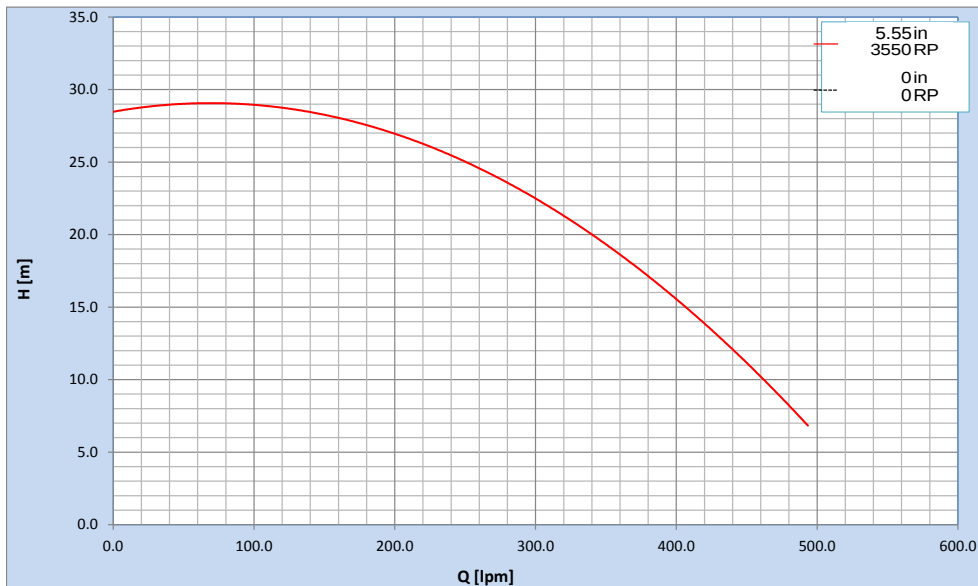

2 X 2